ELECTRIC HAND HELD NUTRUNNER TOOLS

X-SW Series

New Series

Non-reaction Hand held nutrunner tools




Features

- New control method, swing control, reduces reaction force.
- No-load rotation speed is increased by reviewing the mechanical mechanism.
- Lower reaction force and higher speed reduce the load on the operator and improve workability.



Features

- Approximately 83% reduction compared to static tightening
- Approximately 48% reduction compared to conventional blow control

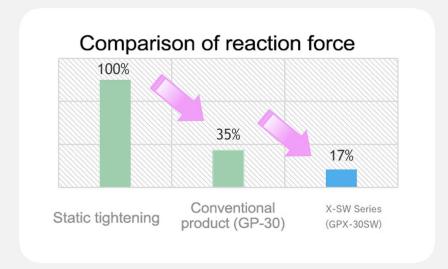

■ No-load rotation speed of 4200 rpm by reviewing the mechanical mechanism

Specifications

model	Applicable Torque(Nm)	Maximum rotation speed (rpm)		controller			cable		
GPX-30SW	10~30	4700	C	GA-T1-N07-MS			GPRK-5M		
[D] H			model	Asq	В	С	D	Е	φ G
B C		GPX- 30SW	9.52	5	11	21.5	12	36.5	
A Asq									
Ä		M			Н	ϕ	J L	М	Weight (Kg)
					113	42	241	127	1.08

